

90° connecting bend for flat and round ducts





Application

- Supply and exhaust ventilation of various premises.
- Connection of flat and round ducts at 90°.

Design

- Made of white plastic.
- Connecting dimensions: 55x110-100, 55x220-100, 55x220-125, 60x122-100, 60x204-100, 60x204-125, 60x204-150, 90x220-125, 90x220-150 mm.
- Flat ducts have direct connection and round ducts are connected through a matching connector.

Code	Dimensions [mm]					
	a	D	D1	b	h	L
521	55x110	100	103	58x113	87	138
621	55x220	96	99	55x60	88	175
622	55x220	121	124	55x60	88	175
721	60x122	100	103	63x125	87	140
821	60x204	97	100	64x208	92	220
822	60x204	122	125	64x208	92	220
823	60x204	147	150	64x208	92	220
922	90x220	122	125	94x226	120	230
923	90x220	147	150	94x226	120	230

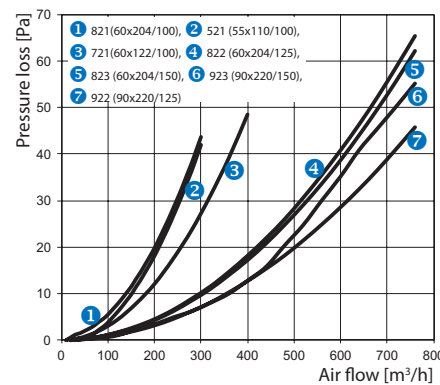

90° connecting bend for flat and flexible round ducts



Application

- Supply and exhaust ventilation of various premises.
- Connection of rigid flat to round flexible ducts at 90°.

Design

- Made of white plastic.
- Connecting dimensions: 220x55-100, 220x55-125 mm.

Code	Dimensions [mm]						
	a	a1	D	b	b1	h	L
621-1	220	226	100	55	60	134	175
622-2	220	226	125	55	60	134	175

